



Netafim Techline CV drip tubing (12" emitter spacing) to be installed during wall construction and backfill process by SmartSlope installer. Installer shall leave 12" out to front of wall. Irrigation contractor shall tie this into center header line and remainder of irrigation system per irrigation system design.

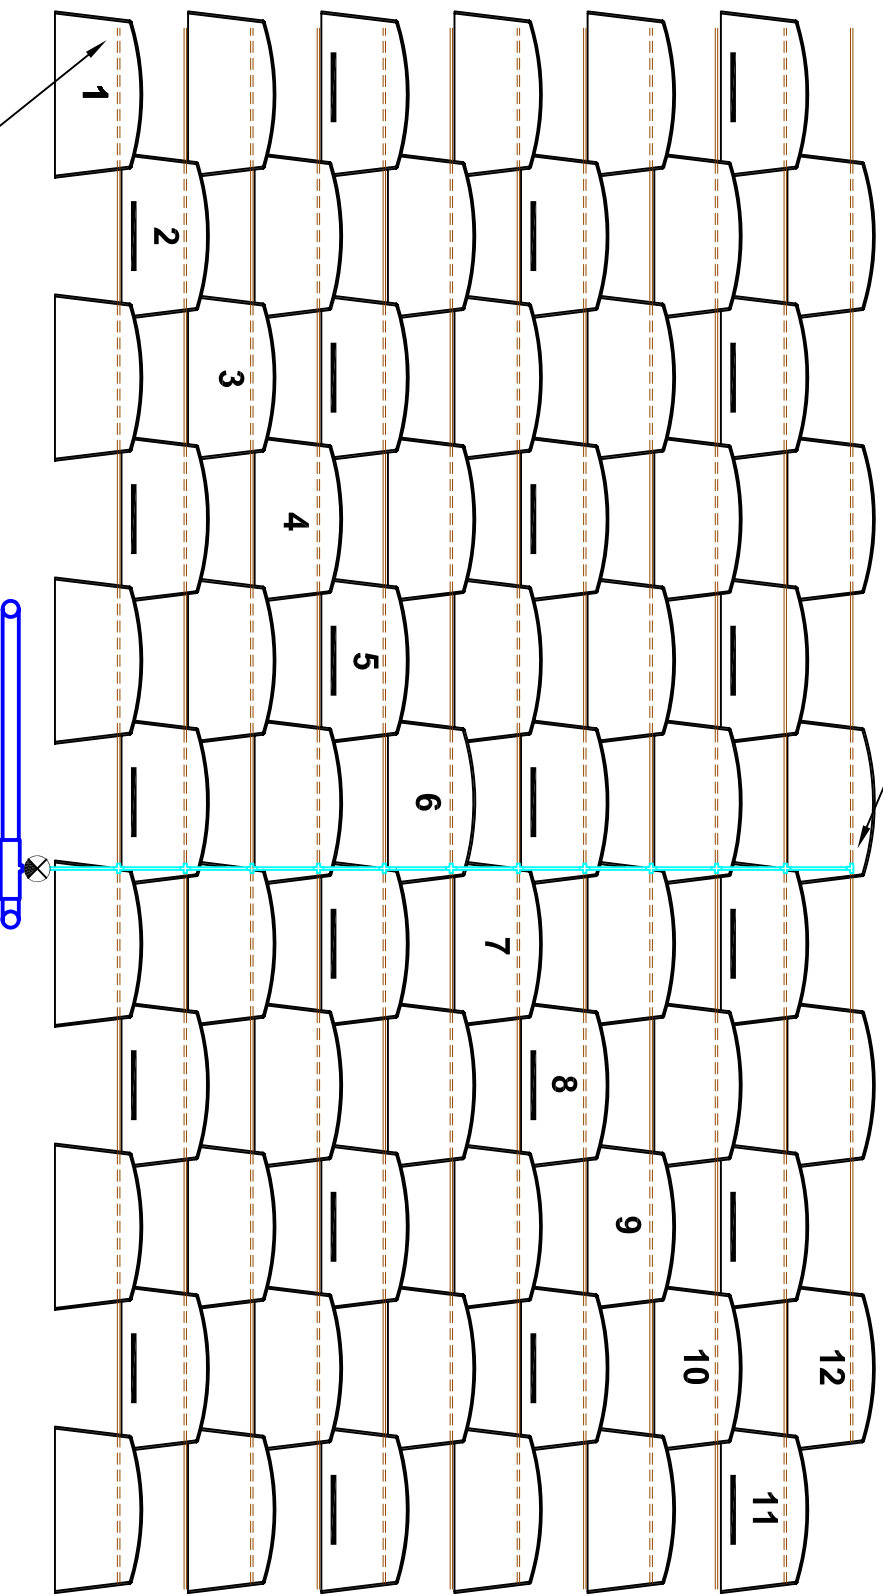

Terminate drip tubing below soil with 'figure 8' fitting as manufactured by Netafim USA. (TYP)

NOTE: Individual drip tubing runs shall not exceed 600' in length when using the specified 0.26 GPH emitter at 12" spacing.



SmartSlope
LIVING RETAINING WALLS

These graphic representations are intended for preliminary design purposes only and are not to be used for construction without the signature of a registered professional engineer.

Scale:
None

**Front Wall Profile with Drip Tubing
(for walls over 600 feet in length)**